

Aeon8800A Anesthesia Workstation





Exclusive Distributor Aeonmed & Heyer For Sulawesi

PT KARYA PRATAMA

Daan Mogot Arcadia Blok F1 No. 8A-8B Jl. Daan mogot Km 21, Kec. Batuceper, Kel. Batuceper, Kota Tangerang, Banten 15122 Telepon : (021) 5595 8085, Fax : (021) 5595 8125

Aeon8800A Anesthesia Workstation

Aeon8800A Anesthesia Workstation is a high-level device from AEONMED, engineered based on clinical input and feedback.

The workstation has a user-friendly design, incorporates innovative technology, and provides the clinician with safe and effective treatment options for patients.

Modern Breathing Circuit

Safe, stable and efficient anesthesia management.

The characteristic breathing circuit is made of alloy, resistant to corrosion and can withstand repeated high temperature and high pressure sterilization.

Adjustable angle, easy to install, many user-friendly designs make maintenance easier.


The integrated heating system with a better thermal conductivity of alloy helps prevent condensation and makes patients feel more comfortable.



APL with fast release function, the upper pressure limit is accurately adjustable, avoiding repeated operations and improving anesthesia efficiency.

The breathing circuit has CO2 bypass function (optional)



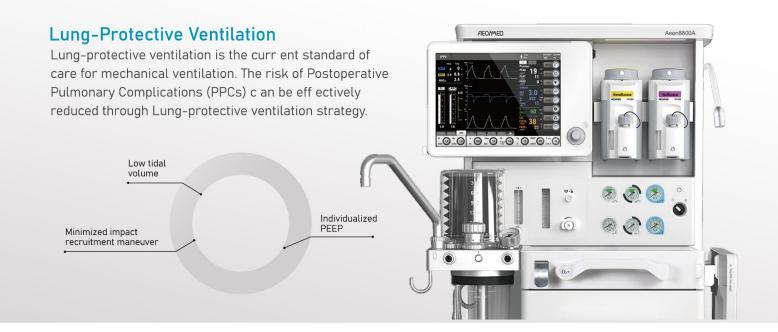

Low tidal volume

Aeon8800A has a minimum tidal volume of 10ml in volume control mode, in addition to possessing the PCV-VG and BIVENT ventilation mode, helping to achieve the precise low tidal volume required during lung protective ventilation.

Individualized PEEP titration tool

Stress index (SI) monitoring helps with Individualized PEEP titration. Through the guidance of the static PV loop tool, the appropriate setting of PEEP value and tidal volume are realized.

Minimized impact recruitment maneuver

Two types recruitment maneuver: stepwise PEEP or sustained inflation. Automate repetitive tasks used during lung ventilation procedures.







Enhanced monitoring and clinical tools

In addition to traditional monitoring parameters, special monitoring parameters,

such as Driving Pressure(DP), are provided to guide clinicians in adjusting ventilation parameters.

Spirometry loops can be stored for future reference, allowing clinicians the ability to better understand changes in the patien's response to therapy.

Provide multiple of Cardiopulmonary Bypass (CPB) modes to assist in the implementation of cardiopulmonary bypass surgery.

Continuous trend information together with time discrete events are stored and shown in the table or chart.

Provide medical gas consumption calculations: including 02, N20 and Agent. And provide calculations of C02 production. International standard data protocol support to connect to internet center of hospitals.

Ventilator-level ventilation modes

Aeon8800A is always your professional guard for lives, offering comprehensive and accurate respiratory care for all the patient types from infant to adult, helping clinicians to have more solutions for different clinical situations.

IPPV | PCV | PCV-VG SIMV-VC | SIMV-PC | SIMV-VG PS / CPAP | BIVENT | APRV

PCV-VG

Combines the advantages of VCV and PCV, providing better oxygenation with lower peak inspiratory pressure.

SIMV-VG

Guarantees patients can breathe spontaneously between mandatory breaths with pressure support as a backup. It offers flexible respiratory solutions when anesthesia steps into different phases.

BIVENT / APRV

Pressure controlled breaths are provided by switching between a high and low airway pressure in an adjustable time sequence. Spontaneous breaths can be pressure supported at the high and low pressure levels.







Intelligent operations bring cost-effective management

Digital Flowmeter with ECO-Optimizer

- Digital Flowmeter makes fresh gas flow setting easier and more precise.
- The ECO-Optimizer indicates the recommended fresh gas flow setting according to the set parameters and the minimum 02 needed of the patient. It enables a safe Low Flow, and reduces the waste of anesthetic agents and medical gases.





Economical

Agents and Medical Gases in FGF



Pollution

Operating Room, Environment



Patient

Temperature and Humidity

Driving Gas Auto-Switch


- By choosing compressed air as the drive g as, Driven Gas A uto-Switch can reduce oxygen consumption, also ensure the patient is ventilated uninterruptedly.
- When the compressed air supply is disrupted, the Aeon8800A will automatically switch to O₂ driving gas.



Technical Specifications

Dimensions (H x W x D)	1400 0 770 0 700 mm
Trolley version (with breathing circuit)	1420×770×760 mm
Weight and load Trolley (without vaporizer and backup cylinder)	135 kg
Top shelf load	25 kg
Caster locking	was tolk
Braking types	Central brake system
Power and battery backup	
Power Input	AC 100~240 V, 50/60 Hz
Power outlets	4 sockets on back, 1.5A Individual
Batteries and operation time with fully charged	DC 24V, 4.0AH, Minimum 120 minutes
Environmental requirements	10, 4016 (60, 104.16)
Operation temperature Operation humidity	10~40 °C (50~104 °F) ≤95% (non-condensing)
Storage temperature	-20~60 °C (-4~131 °F)
Storage humidity	≤95% (non-condensing)
ANESTHESIA GAS SUPPLY MODULE	4.35 to from conditioning)
Gassupply	O ₂ , N ₂ O, AIR; 280~600kPa
Cylinder yokes	Optional
Fresh gas flow Indicator	Electronically controlled mixer
Range of fresh gas flow indicators	0~18L/min or set each gas independently: O ₂ , N ₂ O: 0~10L/min; AIR: 0~12L/min
O ₂ flush	25~75 L/mln
Auxiliary Common Gas Outlet (ACGO)	Optional Optional
Anesthetic Gas Scavenging System (AGSS) Vaporizer	Оргинас
Agent	Sevoflurane, Halothane, Enflurane, Isoflurane
Installation mode	Selectatec* with interlock, optional standby vaporizer parking holder
Filling type	Pour-Fill, Key-Fill, Quik-Fil*
Breathing system	
Volume of CO₂ absorber	1.5 L for single canister
APLrange	Spontaneous breathing (SP) -70 cmH ₂ O
Material	Autoclavable (except O ₂ cell and alrway pressure gauge)
Heating system	32-40 °C
CO ₂ bypass VENTILATOR OPERATING SPECIFICATIONS	Optional
Ventilator	Pneumatically driven, Electronically controlled
Ventilation modes – standard	Manual/Spontaneous
	Volume control (IPPV)
	Pressure control (PCV)
Ventilation modes - options	Pressure Controlled Ventilation Volume Guaranteed (PCV-VG)
	Synchronized Intermittent Mandatory Ventilation in Volume (SIMV-VC)
	Synchronized Intermittent Mandatory Ventilation in Pressure (SIMV-PC)
	Synchronized Intermittent Mandatory Ventilation in PCV-VG (SIMV-VG)
	Pressure Support (PS) / Continuos Positive Airway Pressure (CPAP)
	Bilevel Positive Airway Pressure Ventilation (BIVENT) Airway Pressure Release Ventilation (APRV)
Control in put ranges	Allway Pressure Release vericiation (APRV)
Breathing frequency (Freq)	2~100 bpm
Positive end expiratory pressure (PEEP)	OFF, 3~50 cmH ₂ O
Inspiration/expiration ratio (I:E)	4:1~1:B
Tidal volume (Vt)	10~1500 ml
Inspiration pause	OFF, 5%~60%
Inspiratory time	0.2~5.0 s
Inspiratory pressure (Pressur)	5~70 cmH ₂ 0
Pressure support level (ΔP)	3-60 cmH ₂ 0
Pressure limit (P _{max}) Trigger	10~100 cmH ₂ O 0.5~15 L/min / -20~-1cmH ₂ O
Inspiratory slope time (Ts.oss)	0.5~15 c/min/ / -20~-1cmm ₂ 0 0~2s
Compensation	Compliance and Leak compensation, fresh gas compensation, altitude compensation
Ventilator monitoring & alarm	One and the second an
Monitoring	Continuous monitoring of inspiratory O ₂ concentration, breathing frequency, tidal
	volume, minute volume, peak airway pressure, PEEP, mean or plateau pressure, I:E ratio,
	resistance, compliance. Option: driving pressure, stress index, CO ₂ concentration,
	para magnetic oxygen analyzer, anesthetic gas concentration with MAC
Trend storage	Maximum 720 hours of trend data table, 72 hours of trend chart
Medical gas calculations	Consumption of O., N.O and Agent, Calculations of CO. production, (require relevant gas monitorin
Control screen Graph display	15" TFT color touch screen Waveforms of P-t, F-t, V-t, CO ₃ -t (ootlon), P-V Loop, V-F Loop, P-F Loop
Alarm	MV high/low limit, FiO ₂ high/low limit, Paw high/low limit, Power failure
Natio	High Freq, Negative pressure, Continuous ainway pressure, Apnea alarm, etc.
	Alarm (Silence ≤ 120 seconds)
	Marring Siterice ~ 120 Seconds)





Daan Mogot Arcadia Blok F1 No. 8A-8B Jl. Daan mogot Km 21, Kec. Batuceper, Kel. Batuceper, Kota Tangerang, Banten 15122 Telepon : (021) 5595 8085, Fax : (021) 5595 8125